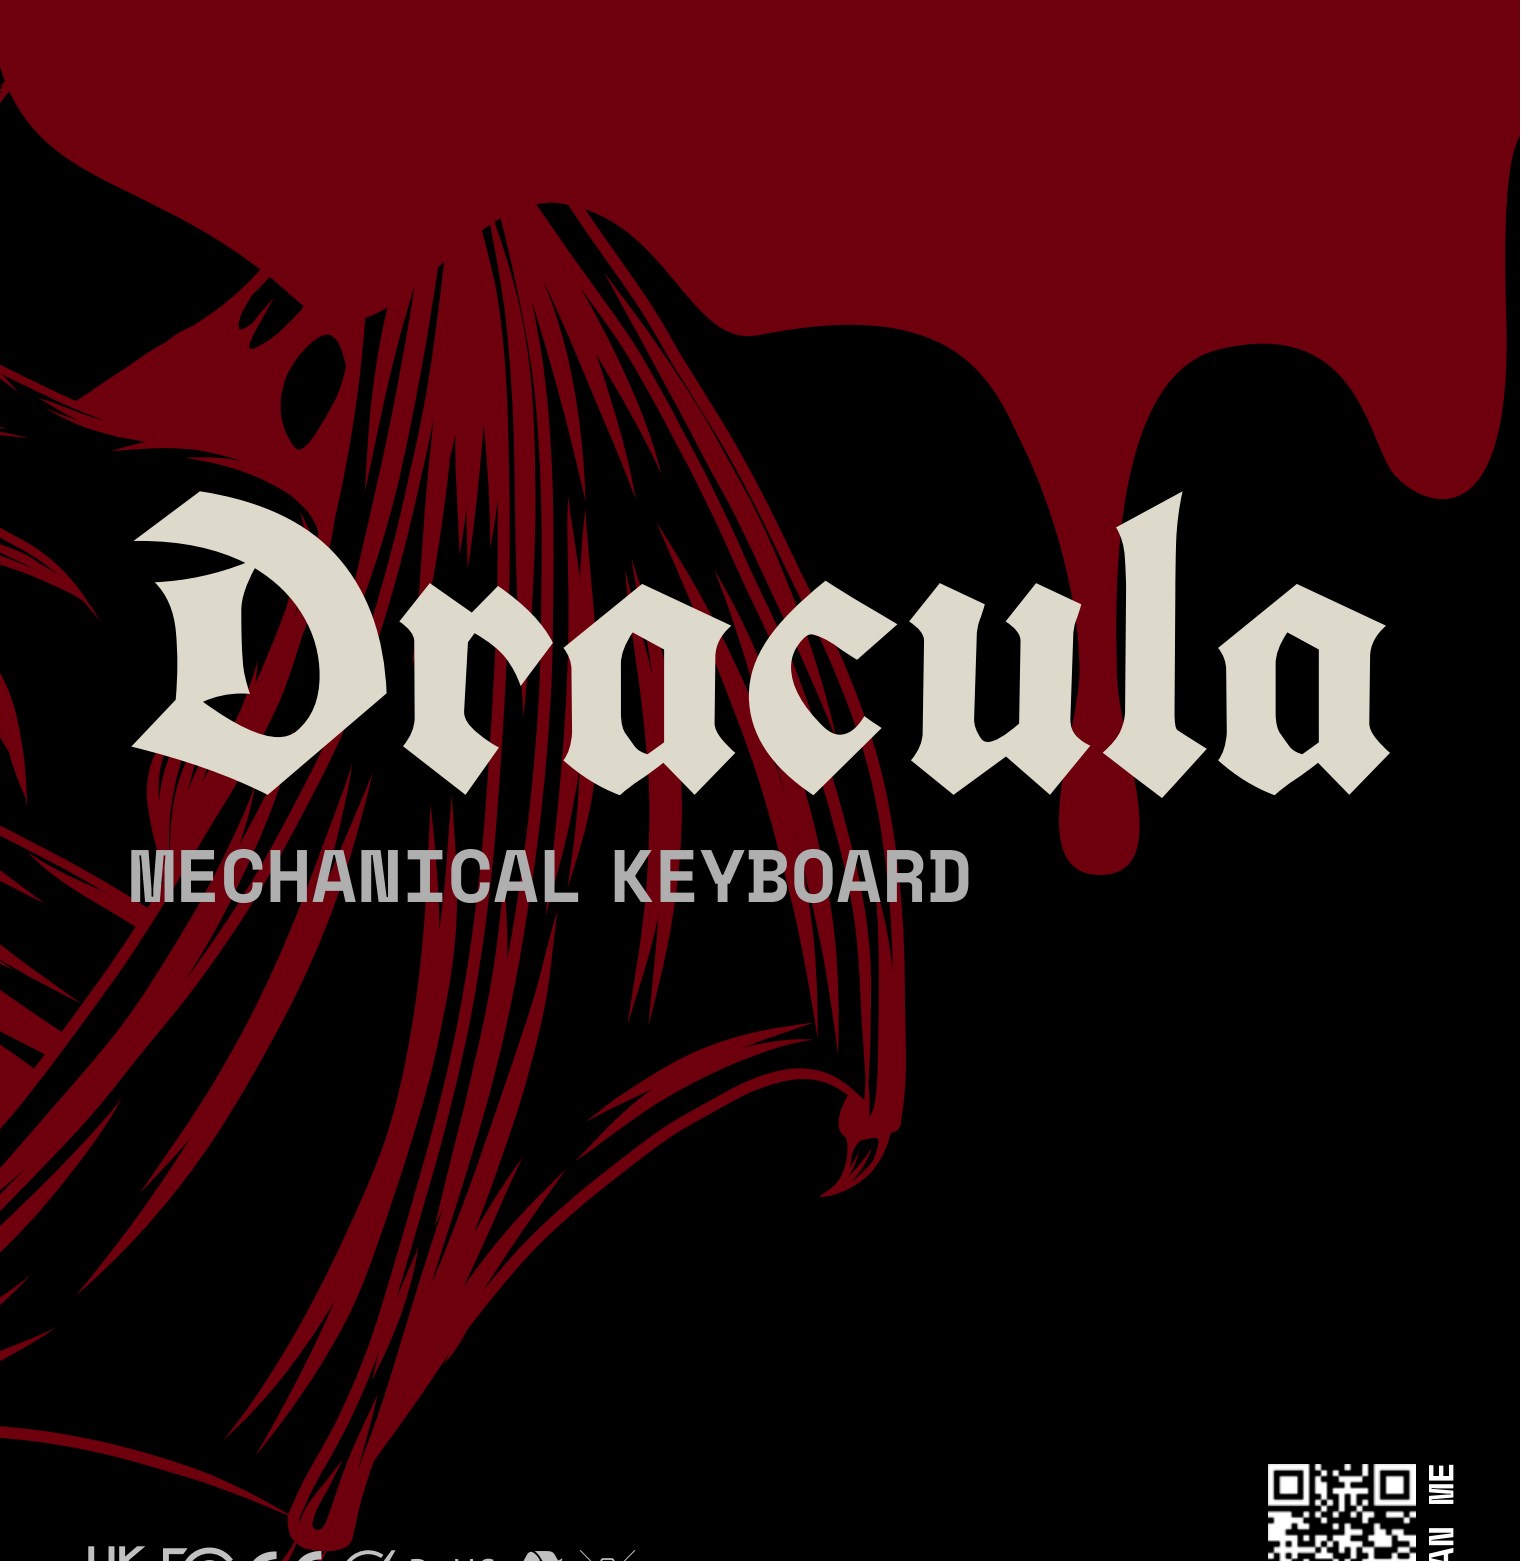

Dracula

MECHANICAL KEYBOARD

UK CA FC CE RoHS COMPLIANT

SCAN ME

Dracu

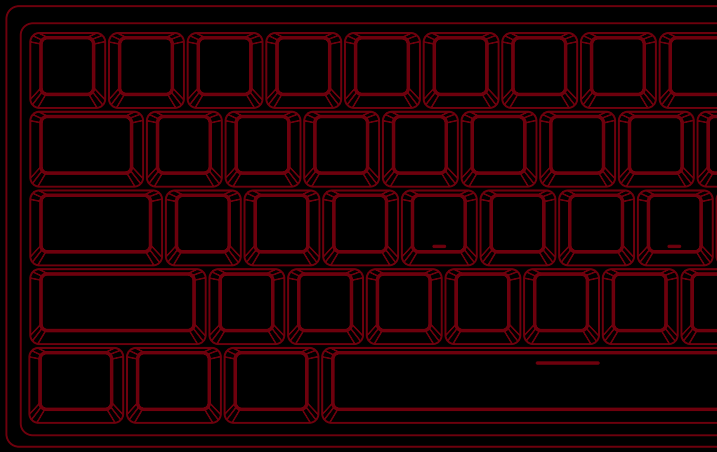

TECH SPECIFICATIONS

MODEL:

KEY NR:

CONNECTIVITY:

STABILIZER TYPE:

PCB TYPE:

ANTI-GHOST:

POLLING RATE:

COMPATIBILITY:

DIMENSION:

WEIGHT:

QWERTYKEY.EU

QWERTYKEY.RO

la 65



QwertyKey 65
66 Keys + 1 Knob
USB Wired/BT5.0/2.4G
Plate-mounted
Hotswap 3/5 pins, full RGB
NKRO
1000hz
WINDOWS/MAC
330x125x38mm
0,6kg

SCAN ME

FUNCTION KEYS

Hold FN + listed keys to activate

FN + 1 - F1
FN + 2 - F2
FN + 3 - F3
FN + 4 - F4
FN + 5 - F5
FN + 6 - F6
FN + 7 - F7

FN + 8 - F8
FN + 9 - F9
FN + 0 - F10
FN + -_ - F11
FN + =+ - F12
FN + Win - Win Lock
FN + Pg Dn - End

FN + ESC - `
FN + I - PRTSC
FN + O - Scroll Lock
FN + P - Pause
FN + Del - Insert
FN + Pg Up - Home

BACKLIGHT KEYS

FN + ↑ - Brightness +
FN + ↓ - Brightness -
FN + } - Speed +
FN + { - Speed -
FN + Enter - Turn off/on the backlight
FN + \| - Switch backlight mode
FN + → - Hue +
FN + ← - Hue -
FN + ;: - Saturation +
FN + ‘” - Saturation -
FN + Backspace - Long press 3 seconds to reset the keyboard

EXTRA KEYS

- Delete

- Page Up

- Page Down

Windows ⇆ Mac OS Toggle switch at the back of the keyboard

BATTERY CHECKING

FN + Space - Battery level indicator. From !1 to)0 stands for 10%~100%

WIRED MODE

Switch the mode to the middle position (USB mode), then connect the USB cable to your computer. Once the keyboard's backlight turns on and displays the default RGB effect, the connection is successfull.

BLUETOOTH PAIRING

QK65 keyboard can connect up to 3 devices at the same time. Follow these steps to pair the keyboard with your device(s).

1. Switch the mode to Bluetooth, then press and hold FN + Q/W/E for 3-5 seconds to enter pairing mode. The Q/W/E key will flash blue rapidly, indicating the keyboard is ready to connect.
2. Select one of the three options: "QK65-1", "QK65-2", or "QK65-3" to pair, from device's Bluetooth settings.
3. Once the keyboard is connected to your device, the Q/W/E key will stop flashing, indicating a successful Bluetooth pairing. To switch between paired Bluetooth devices, simply press FN + Q, FN + W, or FN + E.

The Bluetooth connection has a memory feature. When the keyboard is powered off, it will disconnect. Upon powering it back on, it will automatically reconnect to the last paired device.

2.4Ghz CONNECTION

Switch the mode to 2.4GHz
Press and hold FN + R to enter 2.4GHz pairing mode.
The R key will flash green rapidly.
Insert the 2.4GHz dongle into your device's USB port.
Once the connection is successful, the R key will stop blinking.

SLEEP MODE

If no keys are pressed for 5 minutes, the backlighting will turn off. Any keypress will reactivate the backlight.
After 30 minutes of inactivity in Bluetooth mode, the keyboard will enter deep sleep, disconnecting Bluetooth. Pressing any key will wake the keyboard.

BATTERY CHARGING

FN Key with default RGB effect under wireless connection, the FN key will blink red when the keyboard's battery is low (below 3.5V). Checking the battery level under the wireless connection, A steady red light will display while charging.

Warning: Do not connect the keyboard directly to an electrical outlet!

The keyboard is designed to be powered only via a USB cable connected exclusively to a compatible device, such as a laptop or PC.

CUSTOM CONFIGURATION

Remap the keys via VIA firmware in wired mode and 2.4G
To ensure your keyboard is properly connected to your
installation steps:

Visit https://github.com/WestBerryVIA/via-releases/re
VIA application for your computer.



- Updated version of Electron to latest stable
- Updated icons to latest
- Fixed opening links from opening additional electron windows
- Updated window preferences to enable File Save API

Download the 2.4G.JSON and USB.JSON files from the www
downloading, upload the appropriate JSON file to the V
- Select the 2.4G JSON file if you are using 2.4GHz mo
- Select the USB JSON file if you are using the wired



mode.
computer, follow these

leases to download the latest

Search or jump to...
Sign in
Sign up
Notifications
Fork 7
Star 59
Find a release

369 Bytes	Mar 10, 2023
330 Bytes	Mar 10, 2023
330 Bytes	Mar 10, 2023
92.1 MB	Mar 10, 2023
64.5 MB	Mar 10, 2023
87 MB	Mar 10, 2023
93.9 KB	Mar 10, 2023
67 MB	Mar 10, 2023
74.1 KB	Mar 10, 2023

.qwertykey.ro/eu website. After
IA software:
de.
connection.



VIA will automatically detect your keyboard once it is plugged in.

The keyboard's memory is persistent, meaning it will remember your settings regardless of where it is plugged in.

In the VIA software, to change a key:

1. On the top half of the interface, select the key you want to modify by clicking on it with your mouse.
2. In the bottom half, choose the new function or action you want for that key.
3. The change will take effect immediately.

MACROS Settings

In VIA software, you can remap keys to replace special keys with the ones you prefer.

RGB Backlight Effects

The QK65 VIA software offers a variety of default RGB lighting effects. You can adjust the lighting's brightness, speed, and color, as well as customize the effects to your preference.

The VIA software provides a 0-3 layer keyboard layout:
Layer 0: This layer is activated when the keyboard is connected to a Windows/Mac system. To switch to this layer, toggle the switch in the upper-right corner of the keyboard to the WIN/MAC position. On this layer:

- Left Alt = Left Option (Mac)
- Left Win = Left Command (Mac)
- Right Alt = Right Option (Mac)

Layer 1 is activated by toggling the system to Windows or Mac and holding FN1 (or FN3) key.
Layer 2 is activated by mapping a key to MO(2) and long pressing it.
Layer 3 is activated by mapping a key to MO(3) and long pressing it.

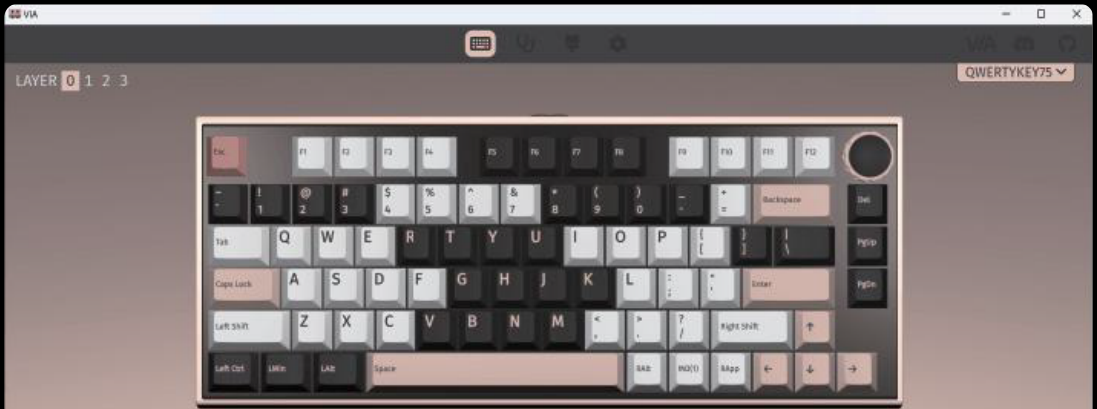

REPLACING KEYCAPS AND SWITCHES

TOOLS INCLUDED

Keycap Puller
Switch Puller
USB Type C cable



Push straight DOWN

Before installing switches, be sure the pins are clean and straight.

INSTALLING SWITCHES



1. Check that all the metallic pins of the switch are perfectly straight.
2. Align the switch vertically
3. Press the switch down until you hear a click. This means your switch clips have attached themselves to the keyboard plate.
4. In case the switch doesn't work, check the metal pins again.

REMOVE SWITCHES

1. Grab your switch Removal Tool and align the gripping teeth vertically (on the Y-Axis) at the center of the switch, as shown in the example graphic below.
2. Grab the switch with the switch puller and apply pressure until the switch releases itself from the plate.
3. Using firm but gentle force pull the switch away from the keyboard using vertical motion.



For any tehnical issues, please send an email to help@qwertykey.ro with your order number and a detailed description of your problem.

Dracu

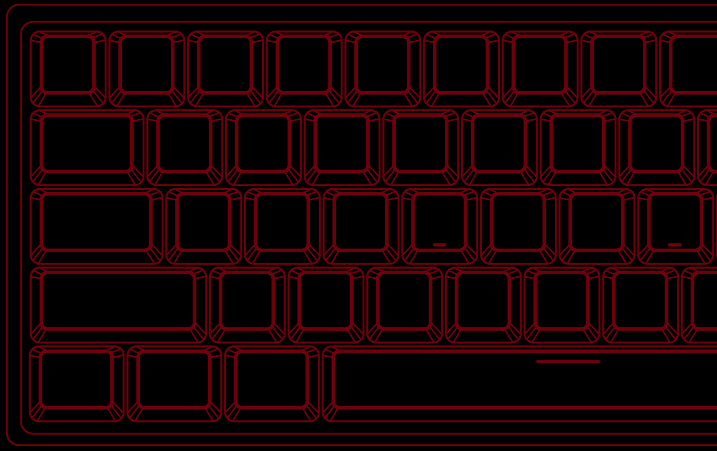

SPECIFICATII TEHNICE

MODEL:
NR TASTE:
CONECTIVITATE:
TIP STABILIZATOARE:
TIP PCB:
ANTI-GHOST:
POLLING RATE:
COMPATIBILITATE:
DIMENSIUNE:
GREUTATE:

QWERTYKEY.EU
QWERTYKEY.RO

la 65



QwertyKey 65

66 Taste + 1 Knob

USB Wired/BT5.0/2.4G

Plate-mounted

Hotswap 3/5 pins, full RGB

NKRO

1000hz

WINDOWS/MAC

330x125x38mm

0,6kg

SCAN ME

COMBINATII DE TASTE

Țineți apăsată tasta FN + tastele enumerate pentru activare

FN + 1 - F1
FN + 2 - F2
FN + 3 - F3
FN + 4 - F4
FN + 5 - F5
FN + 6 - F6
FN + 7 - F7

FN + 8 - F8
FN + 9 - F9
FN + 0 - F10
FN + -_ - F11
FN + =+ - F12
FN + Win - Win Lock
FN + PgDn - Sfarsit

FN + ESC - `
FN + I - Captura ecran
FN + O - Scroll Lock
FN + P - Pauza
FN + Del - Insereaza
FN + PgUp - Acasa

EFECTE DE ILUMINARE

FN + ↑ - Luminozitate +
FN + ↓ - Luminozitate -
FN + } - Viteza efect iluminare +
FN + { - Viteza efect iluminare -
FN + Enter - Pornire/Oprire Iluminare de fundal
FN + \| - Schimbarea modului de iluminare
FN + → - Nuanța iluminării +
FN + ← - Nuanța iluminării -
FN + ;: - Saturatie +
FN + ‘” - Saturatie -
FN + Backspace - Apasati 3 secunde pentru a reseta tastatura

EXTRA KEYS

- Del

- PgUp

- PgDn

Windows ⇆ Mac OS Comutati butonul pentru a schimba sistemul de operare

VERIFICAREA BATERIEI

FN + Space - Indicator nivel baterie. De la !1 la)0 reprezintă 10%~100%

MODUL CABLU

Schimbați pe modul USB, apoi conectați cablul USB la computer. După ce iluminarea tastaturii se aprinde și afișează efectul RGB implicit, conexiunea este stabilită.

Conectare Bluetooth

Tastatura QK65 poate fi conectată până la 3 dispozitive simultan prin Bluetooth. Urmăriți acești pași pentru a împerechea tastatura cu dispozitivul/le:

1. Comutați pe modul Bluetooth, țineți apăsată tasta FN + Q/W/E timp de 3-5 secunde pentru a intra în modul de împerechere. Tasta Q/W/E va clipi rapid în albastru, indicând faptul că tastatura este pregătită pentru conectare.
2. Selectați una dintre cele trei opțiuni: „QK65-1", „QK65-2" sau „QK65-3" pentru a efectua împerecherea, din setările Bluetooth.
3. Tasta Q/W/E va opri clipirea, indicând o împerechere Bluetooth reușită. Pentru a comuta între dispozitivele Bluetooth împerecheate, apăsați FN + Q/W/E.

Conexiunea Bluetooth are o funcție de memorie. Când tastatura este oprită, se va deconecta. La reaprindere, se va reconecta automat la ultimul dispozitiv împerecheat.

Conectare 2.4Ghz

Comutați pe modul 2.4GHz
Țineți apăsat tasta FN + R pentru a intra în modul de împerechere 2.4GHz.
Tasta R va clipi rapid în verde.
Introduceți dongle-ul 2.4GHz în portul USB al dispozitivului dumneavoastră.
După ce conexiunea este reușită, tasta R va opri clipirea.

Modul inactiv

Dacă nu se apasă nicio tastă timp de 5 minute, iluminarea de fundal se va opri.
Oricare apăsare de tastă va reactiva iluminarea.
După 30 de minute de inactivitate în modul Bluetooth, tastatura va intra în modul de somn adânc, deconectând Bluetooth-ul. Apăsând orice tastă, tastatura se va trezi.

Incarcarea bateriei

Tasta FN cu efect RGB implicit sub conexiune wireless va clipi roșu atunci când bateria tastaturii este scăzută (sub 3,5V). Pentru a verifica nivelul bateriei în timpul conexiunii wireless, se va afișa o lumină roșie constantă în timpul încărcării.

ATENȚIE: Nu conectați tastatura direct la o priză electrică!

Tastatura este proiectată să fie alimentată doar prin cablu USB exclusiv la un dispozitiv compatibil, cum ar fi: Laptop, PC

CONFIGURARE CUSTOM

Reconfigurați tastele prin firmware-ul VIA în m
Pentru a vă asigura că tastatura este corect
urmăriți acești pași de instalare:

Vizitați https://github.com/WestBerryVIA/via-
mai recentă aplicație VIA pentru computerul d



WestBerryVIA / via-releases Public

Mar 10, 2023
v3.0.0
73651ae

3.0.0

- Updated version of Electron to latest stable
- Updated icons to latest
- Fixed opening links from opening additional electron wi
- Updated window preferences to enable File Save API

latest-linux.yml
latest-mac.yml
latest.yml
via-3.0.0-linux.AppImage
via-3.0.0-linux.deb
via-3.0.0-mac.dmg
via-3.0.0-mac.dmg.blockmap
via-3.0.0-win.exe
via-3.0.0-win.exe.blockmap

Descărcați fișierele 2.4G.JSON și USB.JSON de
După descărcare, încărcați fișierul JSON cor
- Selectați fișierul 2.4G JSON dacă utilizați
- Selectați fișierul USB JSON dacă utilizați c



odul cablu și modul 2.4G.
conectată la computerul dumneavoastră,

releases/releases pentru a descărca cea
umneavoastră.



pe site-ul www.qwertykey.ro/eu.
espunzător în software-ul VIA:
modul 2.4GHz.
conexiunea prin cablu.



VIA va detecta automat tastatura imediat ce aceasta este conectată.

Memoria tastaturii este persistentă, ceea ce înseamnă că va reține setările tale indiferent de portul în care este conectată.

În software-ul VIA, pentru a schimba o tastă:
1. În partea de sus a interfeței, selectați tasta pe care doriți să o modificați.
2. În partea de jos, alegeți noua funcție sau acțiune dorită pentru acea tastă.
3. Modificarea va avea efect imediat.

SETARI MACROS

În software-ul VIA, puteți reconfigura tastele și pentru a înlocui tastele speciale cu cele pe care le preferați.

Efecte de Iluminare RGB

Software-ul VIA pentru QK65 oferă o varietate de efecte de iluminare RGB implicite. Puteți ajusta luminozitatea, viteza și culoarea iluminării, precum și personaliza efectele după preferințele dumneavoastră.

Software-ul VIA oferă o configurare a tastaturii pe layere de la 0 la 3:
Layer 0: Acest strat este activat atunci când tastatura este conectată la un sistem Windows/Mac. Pentru a trece la acest strat, comutați butonul din colțul din dreapta sus al tastaturii în poziția WIN/MAC. Pe acest strat:
- Stanga Alt = Stanga Option (Mac)
- Stanga Win = Stanga Command (Mac)
- Dreapta Alt = Dreapta Option (Mac)

Layer 1 este activat prin comutarea sistemului pe Windows sau Mac și ținând apăsată tasta FN1 (sau FN3).
Layer 2 este activat prin maparea unei taste la MO(2) și ținând-o apăsată.
Layer 3 este activat prin maparea unei taste la MO(3) și ținând-o apăsată.

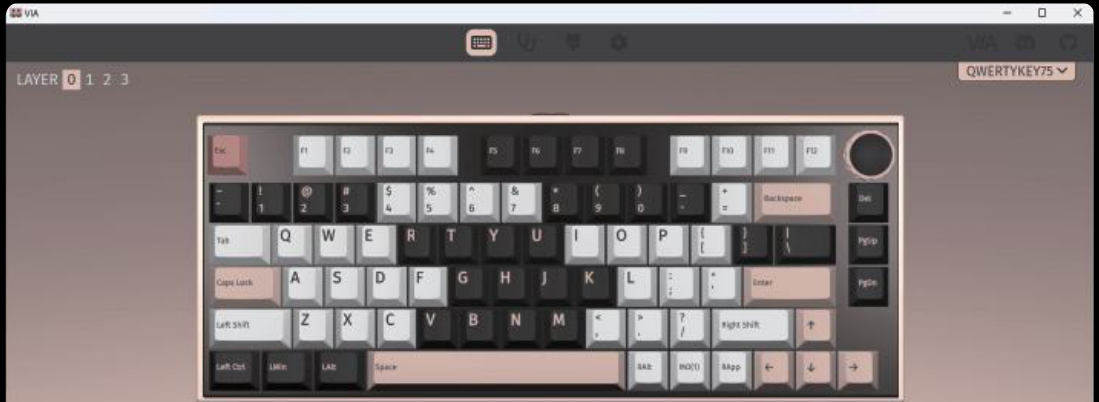

ÎNLOCUIREA KEYCAP-URILOR ȘI A SWITCH-URILOR

ACCESORII INCLUSE

Keycap puller
Switch puller
Cablu USB Type-C



Împingeți direct ÎN JOS.

Înainte de a instala comutatoarele, asigurați-vă că pinii sunt curați și drepți.

INSTALAREA SWITCH-URILOR



1. Verifică dacă toți pinii metalici ai switch-ului sunt perfect drepți.
2. Aliniați comutatorul vertical
3. Apăsați comutatorul în jos până când auziți un clic.Aceasta înseamnă că clemele comutatorului s-au prins de placa tastaturii.
4. În cazul în care comutatorul nu funcționează, verificați din nou pinii metalici.

ÎNDEPĂRTAȚI SWITCH-URILE

1. Prindeți instrumentul de îndepărtare a comutatoarelor și aliniați dinții de prindere vertical (pe axa Y) la centrul comutatorului, așa cum este arătat în imaginea de mai jos.
2. Prindeți comutatorul cu instrumentul de îndepărtare a comutatoarelor și aplicați presiune până când comutatorul se eliberează de pe placă.
3. Folosind o forță fermă, dar delicată, trageți comutatorul de pe tastatură folosind o mișcare verticală.



Pentru orice probleme tehnice, vă rugăm să trimiteți un email la help@qwertykey.ro, incluzând numărul comenzii și o descriere detaliată a problemei.