


QK FALCON PRO

ULTRALIGHT HIGHSPEED GAMING MOUSE

USER MANUAL

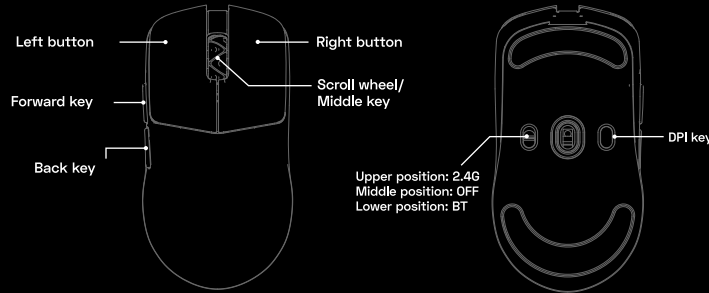

SPECIFICATIONS

Polling rate	Sensor	MCU	Weight
Up to 8000 Hz	Pixart 3950	Nordic 54L15	45g±3g

5 DPI LEVELS
5 preset levels, up to 60,000 DPI via software

● 400	● 3200	60,000 (software only)
● 800	● 6400	
● 1600		

Tracking Speed	Dimensions	Acceleration
750 IPS	122x64x39mm	50G
Charging Time	Cable	Encoder
Approx. 1.5 hours	1.8 m Paracord Cable	TTC Golden Anti-Dust

Battery life	Main switches
Approx. 200 hours @ 1000 Hz Approx. 35 hours @ 8000 Hz	Kailh Optical 150 million clicks

Side switches
TTC Mechanical 3 million clicks

EN

QwertyKey Studio

Connect all your QwertyKey devices in one place. Customize your mouse, adjust performance settings and save personalized profiles. Use QwertyKey Studio directly in your browser or download it for Windows, macOS or Linux.

Operating guide

DPI Switching - Press the DPI button to cycle through the available DPI levels.

Power / Connection Mode Switch

2.4G - Wireless mode OFF - Mouse powered off BT - Bluetooth mode

Polling Rate Adjustment

Wired: 1000 / 8000 Hz **2.4G:** 1000 / 8000 Hz **Bluetooth:** 125 Hz
Default polling rate: 1000 Hz

Connectivity

2.4G Pairing

Switch the mouse to 2.4G mode and connect the USB receiver to your computer. If the mouse does not connect automatically, press and hold the Left Button + Right Button + Scroll Wheel simultaneously for 3 seconds. The indicator will flash yellow while pairing.

Bluetooth pairing

Switch the mouse to BT mode and select the mouse from your device's Bluetooth settings. If pairing is required, press and hold the Left Button + Right Button + Scroll Wheel simultaneously for 3 seconds. The indicator will flash blue while pairing.

Charging

Battery below 20% → Indicator flashes red
During charging → Indicator flashes yellow
Fully charged → Indicator remains solid green

SCAN ME!




EN

QK FALCON PRO

ULTRALIGHT HIGHSPEED GAMING MOUSE

MANUAL
INSTRUCTIONI

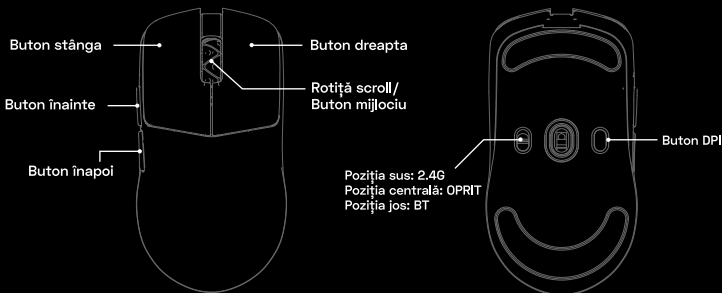

SPECIFICATII

Polling rate	Senzor	MCU	Greutate
Până la 8000 Hz	Pixart3950	Nordic 54L15	45g±3g

5 NIVELURI DPI
5 niveluri presetate, până la 60.000 DPI prin software

400	3200	60.000 (doar prin software)
800	6400	
1600		

Viteză de urmărire 750 IPS	Dimensiuni 122x64x39mm	Accelearație 50G
Timp de încărcare Aprox. 1,5 ore	Cablu Cablu Paracord de 1,8 m	Encoder TTC Golden Anti-Dust
Autonomie baterie Aprox. 200 ore la 1000 Hz Aprox. 35 ore la 8000 Hz	Switch-uri principale Kailh Optical 150 milioane de click-uri	Switch-uri laterale TTC Mechanical 3 milioane de click-uri

RO

QwertyKey Studio

Conectează toate dispozitivele QwertyKey într-un singur loc. Personalizează mouse-ul, ajustează setările de performanță și salvează profiluri personalizate. Folosește QwertyKey Studio direct în browser sau descarcă-l pentru Windows, macOS sau Linux.

Ghid de utilizare

Comutare DPI - Apasă butonul DPI pentru a comuta între nivelurile DPI disponibile.

Mod de Conectare

2.4G - Mod wireless OFF - Mouse oprit BT - Mod Bluetooth

Setare Polling Rate

Cablu: 1000 / 8000 Hz **2.4G:** 1000 / 8000 Hz **Bluetooth:** 125 Hz
Polling rate implicit: 1000 Hz

Conectivitate

Asociere 2.4G

Comută mouse-ul în modul 2.4G și conectează receptorul USB la computer. Dacă mouse-ul nu se conectează automat, ține apăsat simultan Butonul Stânga + Butonul Dreapta + Butonul Rotița Scroll timp de 3 secunde. Indicatorul va clipi galben în timpul asocierii.

Asociere Bluetooth

Comută mouse-ul în modul BT și selectează mouse-ul din setările Bluetooth ale dispozitivului. Dacă este necesară asocierea, ține apăsat simultan Butonul Stânga + Butonul Dreapta + Rotița Scroll timp de 3 secunde. Indicatorul va clipi albastru în timpul asocierii.

Încărcare

Baterie sub 20% → Indicatorul clipește roșu
În timpul încărcării → Indicatorul clipește galben
Încărcare completă → Indicatorul rămâne verde

RO

