

QK61 PRO

7400

USER MANUAL



TECH SPECIFICATIONS


MODEL:	QK61 Pro
KEY NR:	61Key ANSI
CONNECTIVITY:	USB Wired/BT5.0/2.4G
STABILIZER TYPE:	Plate-mounted
PCB TYPE:	Hotswap 3/5 pins, full RGB
ANTI-GHOST:	NKRO
POLLING RATE:	1000hz
COMPATIBILITY:	WINDOWS/MAC
DIMENSION:	302x116x38mm
WEIGHT:	0,6kg



SCAN ME

QWERTYKEY.EU

QWERTYKEY.RO

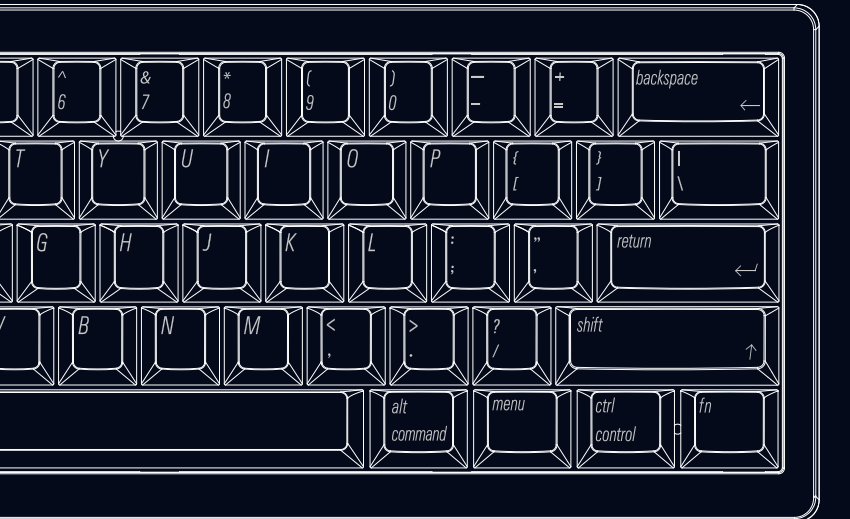

FUNCTION KEY DESCRIPTION

Combination Function Keys









1 - 0	F1 - F10	-	F11
T	Print	=	F12
Y	ScrIk	G	Insert
U	Pause	H	Home
Fn + Win	Win Key Lock	J	Page Up
A	Windows Mode	B	Delete
S	MAC Mode	N	End
ESC		M	Page Dn
Shift + ESC	~		

RGB BACKLIT CONTROL

>	Backlit Brightness +
<	Backlit Brightness -
Fn + X	Indicator Color
V	Backlit Mode Switch
BackSpace	Turn On/Off Backlit

}]	Backlit Effect Speed +
[	Backlit Effect Speed -
Z	Indicator Mode Switch
Enter	Backlit Color Switch

Fn + /?	↑
Fn + All_R	←
Menu	↓
CTRL_R	→

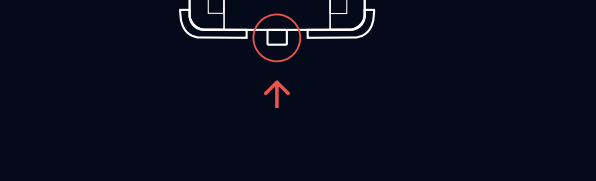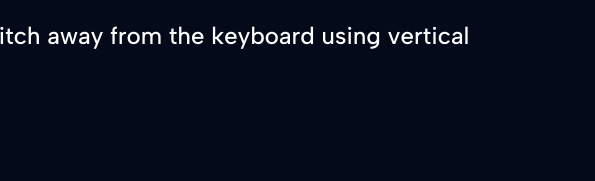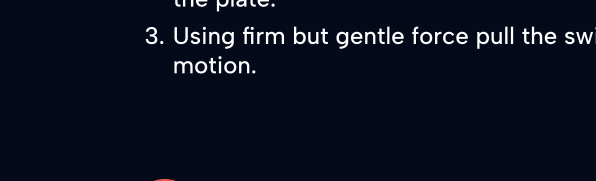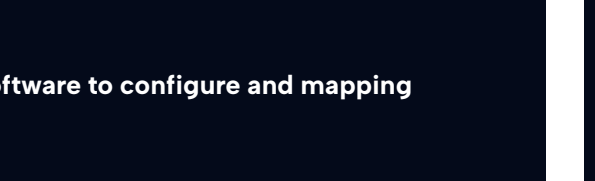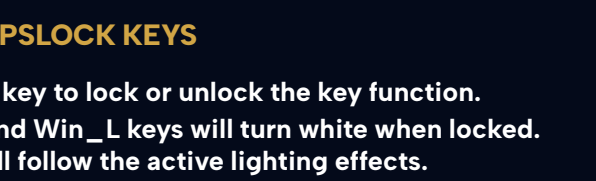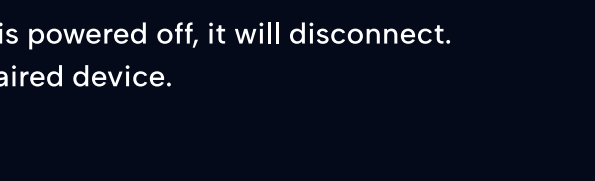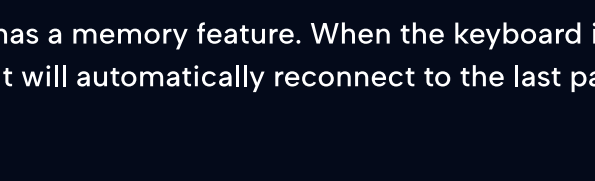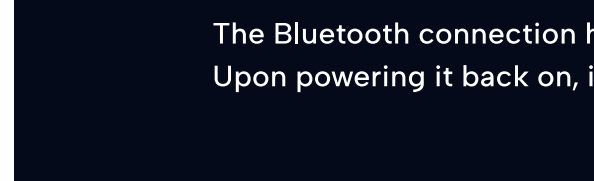

WIRED MODE

Switch the mode button  to the middle position (USB mode), then connect the USB cable to your computer. Once the keyboard's backlight turns on and display the default RGB effect, the connection is successful.

BLUETOOTH PAIRING

QK61 PRO keyboard can connect up to 3 devices at the same time. Follow these steps to pair the keyboard with your device(s).

1. Switch the mode button  to Bluetooth, then press and hold FN+Q/W/E for 3-5 seconds to enter pairing mode. The Q/W/E key will flash blue rapidly, indicating the keyboard is ready to connect.
2. Select one of the three options: QK61Pro_1, QK61Pro_2 or QK61Pro_3 to pair, from device's Bluetooth settings.
3. Once the keyboard is connected to your device, Q/W/E key will stop flashing, indicating a successful Bluetooth pairing. To switch between paired Bluetooth devices, simply press FN+Q, FN+W or FN+E.

The Bluetooth connection has a memory feature. When the keyboard is powered off, it will disconnect. Upon powering it back on, it will automatically reconnect to the last paired device.

2.4GHz CONNECTION

Switch the mode button  to the middle position (USB mode), then connect the USB cable to your computer. Once the keyboard's backlight turns on and display the default RGB effect, the connection is successful.

REPLACING KEYCAPS AND SWITCHES

TOOLS INCLUDED

Keycap/Switch Puller
USB Type C cable

INSTALLING SWITCHES

1. Check that all the metallic pins of the switch are perfectly straight.
2. Align the switch vertically
3. Press the switch down until you hear a click. This means your switch clips have attached themselves to the keyboard plate.
4. In case the switch doesn't work, check the metal pins again.

REMOVE SWITCHES

1. Grab your switch Removal Tool and align the gripping teeth vertically (on the Y-Axis) at the center of the switch, as shown in the example graphic on the right.
2. Grab the switch with the switch puller and apply pressure until the switch releases itself from the plate.
3. Using firm but gentle force pull the switch away from the keyboard using vertical motion.

LOCK/UNLOCK WIN_L & CAPSLOCK KEYS

Press FN + WIN_L or Caps Lock key to lock or unlock the key function. The RGB LED on the Caps Lock and Win_L keys will turn white when locked. When unlocked, the backlight will follow the active lighting effects.

BATTERY CHECKING

FN + Shift_R - Battery level indicator. From !1 to)0 stands for 10%-100%

BATTERY CHARGING

FN Key with default RGB effect under wireless connection, the FN key will blink red when the keyboard's battery is low (below 3.5V). Checking the battery level under the wireless connection, a steady red light will display while charging, and it will turn green when charge to full.

RESET KEYBOARD

Long press FN + Space 3 seconds to reset the keyboard.

CUSTOM CONFIGURATION

QK61 Pro keyboard support web driven software to configure and mapping the keys, and setting the Macro. Please visit: software.qwertykey.ro

SLEEP MODE

If no keys are pressed for 5 minutes, the backlight will turn off. Any keypress will reactivate the backlight. After 30 minutes of inactivity in Bluetooth mode, the keyboard will enter deep sleep, disconnecting Bluetooth. Pressing any key will wake the keyboard.

REPLACING KEYCAPS AND SWITCHES

Before installing switches, be sure the pins are clean and straight.

REPLACING KEYCAPS AND SWITCHES

For any technical issues, please send an email to help@qwertykey.ro with your order number and a detailed description of your problem.